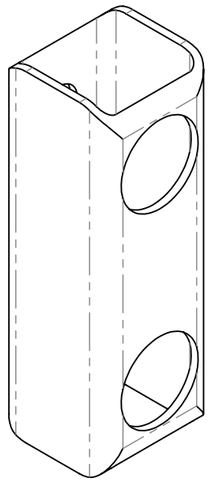

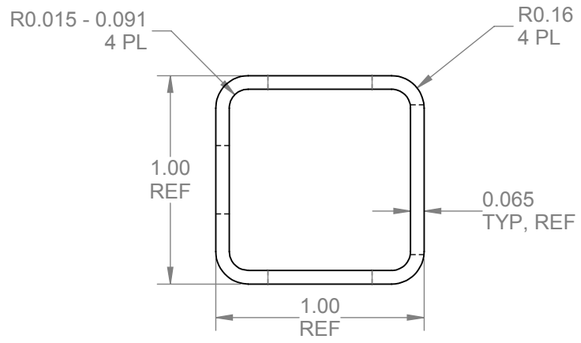

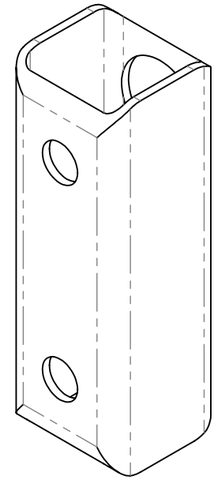

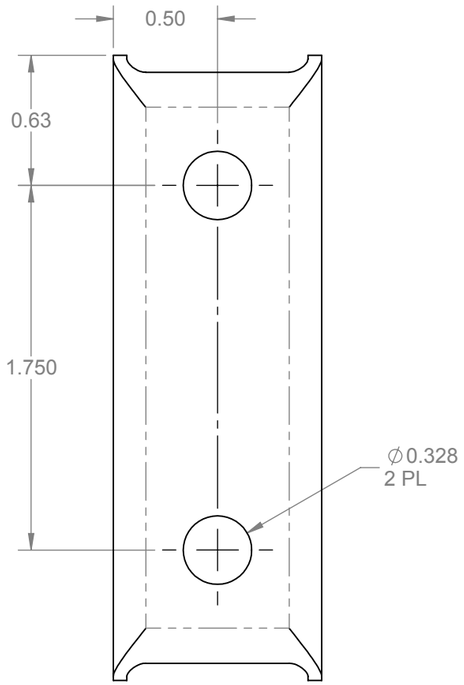

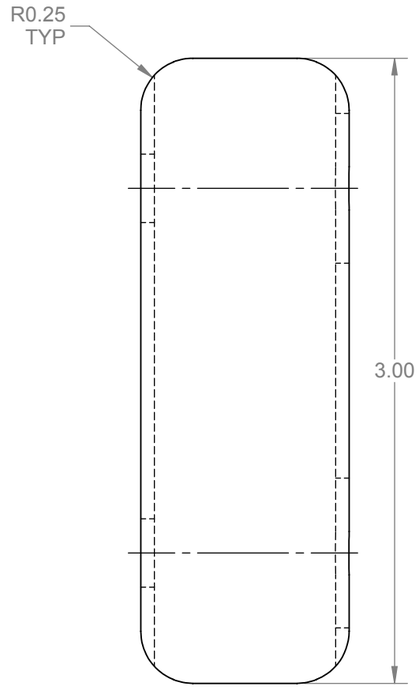

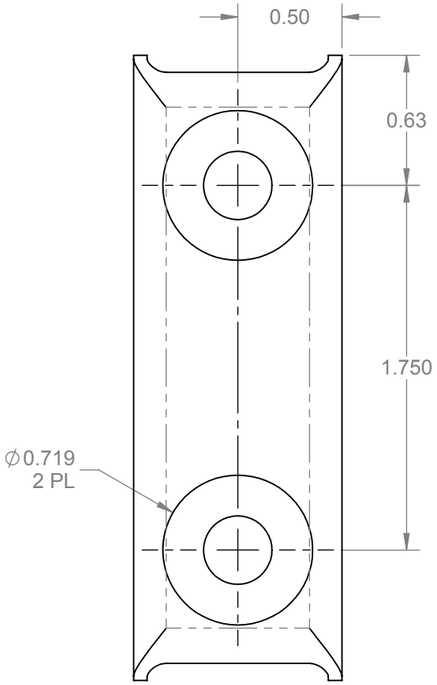

D5449-1 FLOAT SADDLE WASHER

NOTES:
1) MATERIAL MAKE FROM 6061-T6 (OR 6061-T651/T6510/T6511/T62)
ALUMINUM SQUARE TUBE, 1.00 X 1.00 X 0.65 WALL WITH ROUNDED CORNERS
PER AMS-QQ-A-225/8 (OR MS 4117/4128/4115/4116) OR
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6TS
2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1 (ALL SURFACES)
POWDER COAT WHITE (4.3.5.1) PER DART QSI 005 4.3 (NOT NECESSARY ON INTERIOR SURFACES)
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY PER DART QSI 044 6.1
7) WEIGHT: 0.06 lbs

PRELIMINARY ISSUE

REV.	DESCRIPTION	BY	DATE
A	NEW ISSUE	AJS	16.08.04

DESIGN	AJS	DART AEROSPACE LTD	
DRAWN	AJS	HAWKESBURY, ONTARIO, CANADA	
CHECKED	ML	DRAWING NO.	REV. A3
MFG. APPR.	JLM	D5449	SHEET 1 OF 1
APPROVED		TITLE	SCALE
DE APPR.		FLOAT SADDLE WASHER	NTS
DATE	16.08.04		

COPYRIGHT © 2016 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.